

NASA/TM—2002–211602



Global Precipitation Measurement - Report 7 Bridging from TRMM to GPM to 3-Hourly Precipitation Estimates

*J.M. Shepherd, E.A. Smith
W. J. Adams*

National Aeronautics and
Space Administration

Goddard Space Flight Center
Greenbelt, Maryland 20771

April 2002

The NASA STI Program Office ... in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and mission, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results ... even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov/STI-homepage.html>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for AeroSpace Information
7121 Standard Drive
Hanover, MD 21076-1320

Table of Contents

1.0	Introduction	1
2.0	Why are 3-Hour Global Precipitation Data Sets Needed?	1
3.0	Why are 3-Hour Rain Estimation Techniques from TRMM Insufficient?	2
4.0	What are Drawbacks of IR-Based Rain Estimation Techniques?	3
5.0	How will GPM Improve Frequent Global Rain Estimates?	3
6.0	References	7

1.0 Introduction

Historically, multi-decadal measurements of precipitation from surface-based rain gauges have been available over continents. However, oceans remained largely unobserved prior to the beginning of the satellite era. Only after the launch of the first Defense Meteorological Satellite Program (DMSP) satellite in 1987 carrying a well-calibrated and multi-frequency passive microwave radiometer called Special Sensor Microwave/Imager (SSM/I), have systematic and accurate precipitation measurements over oceans become available on a regular basis. See Smith et al. (1994, 1998). Recognizing that satellite-based data are a foremost tool for measuring precipitation, NASA initiated a new research program to measure precipitation from space under its Mission to Planet Earth program in the 1990s. As a result, the Tropical Rainfall Measuring Mission (TRMM), a collaborative mission between NASA and NASDA, was launched in 1997 to measure tropical and subtropical rain. See Simpson et al. (1996) and Kummerow et al. (2000). Motivated by the success of TRMM, and recognizing the need for more comprehensive global precipitation measurements, NASA and NASDA have now planned a new mission, i.e., the Global Precipitation Measurement (GPM) mission.

The primary goal of GPM is to extend TRMM's rainfall time series while making substantial improvements in precipitation observations, specifically in terms of measurement accuracy, sampling frequency, Earth coverage, and spatial resolution. This report addresses four fundamental questions related to the transition from current to future global precipitation observations as denoted by the TRMM and GPM eras, respectively.

2.0 Why are 3-Hour Global Precipitation Data Sets Needed?

High-quality estimates of the amount, temporal evolution, and spatial distribution of precipitation

are important for a wide range of scientific and applications-related research problems including weather forecasting, flood prediction and control, water resources prediction, hurricane monitoring to name a few. However, unlike measurement of less dynamic and more homogenous meteorological fields such as pressure or even temperature, accurate measurement of precipitation is particularly challenging due to its highly stochastic and rapidly changing nature. It is not uncommon to observe a broad spectrum of precipitation rates within the time frame of 1 to 3 hours at a given location. Furthermore, precipitating systems generally exhibit nonhomogeneous spatial distributions of rain rates over local to regional domains.

For the reasons offered, high temporal and spatial sampling of precipitation is preferred in many research and applications problems. Over land, rain gauges and radars are often appropriate for this purpose but generally lack sufficient coverage. In the case of radar, they suffer from calibration error, topographic blocking, beam broadening, beam overshoot, and non-unique reflectivity-rainrate relationships. Notably, most of the Earth is covered by ocean. This suggests that satellite estimation is required for global coverage. Geosynchronous satellite platforms offer the best temporal coverage but to date have been limited to visible and infrared measuring because of the immense antenna sizes required for microwave measuring. Therefore, microwave radiometers and rain radars flown on low altitude satellites have offered the most accurate retrievals, although they are limited by the intrinsic sampling capabilities intrinsic to low-earth orbits.

By the same token, GPM is striving for a 3-hourly sampling using microwave measurements. But why? The answer lies in the scientific desire to achieve unbiased estimates of rainfall. For example, Morrissey and Janowiak (1996) found that pentad and monthly estimates of rainfall introduces temporal sub-sampling uncertainties that

introduce conditional bias which can cause over-estimation or under-estimation of precipitation depending upon the ambient precipitation intensity. For a 3-hourly sampling scheme, the bias is close to zero but increases markedly for a 12-hour sampling scheme. Li et al. (1996) demonstrated that the start-up time of a sampling scheme is as important as the sampling scheme itself, due to bias introduced by the diurnal cycle of precipitation. For arbitrary start-up times, they found a minimal bias for a 3-hourly sampling scheme relative to a 12-hourly scheme. Soman et al. (1995) found similar results using Darwin radar data. In light of these findings and others, 3-hourly sampling is a reasonable and actually an attainable goal with today's and the near future's mix of satellite assets.

Precipitation and the associated latent heating play vital roles in controlling the Earth's general circulation which leads to the variations in weather systems and climate processes. In addition, atmospheric processes are intricately linked to hydrologic, oceanic, and land surface processes through precipitation fluxes. NASA and other agencies seek to evolve a robust observing system to determine the Earth system's variability, forcing, responses, change consequences, and likelihood of predictability. So the measurement of precipitation at temporal and spatial scales concomitant with the actual scales of rain production, sorting, distribution, and fallout becomes essential. By establishing measuring requirements that adhere closer and closer to the cloud macrophysical and microphysical scales at which rain is produced is sure to lead to a better understanding of the 4-dimensional life cycles of precipitating systems. In each area, improved understanding translates to improved climate predictions, weather predictions, and hydrometeorological predictions, which helps serves a broad spectrum of societal applications including agriculture, water resources, health, and public communications.

3.0 Why are 3-Hour Rain Estimation Techniques from TRMM Insufficient?

Adler et al. (2000) are currently using a combination of TRMM and geosynchronous Infrared IR (geo-IR) data to provide 3-hourly estimates of precipitation over 50°N-50°S using an approach based on TRMM post-realtime multi-satellite algorithm 3B42. This product initially uses a combination of TRMM estimates and TRMM-calibrated SSM/I estimates. However, because the low Earth orbit sampling properties of TRMM and DMSP satellites leave spatial gaps at the 3-hour time resolution, microwave-calibrated geo-IR estimates are used to fill the gaps. The merged 3-hour product is typically available with a 3-hour data latency (i.e., delay after realtime). These current TRMM-calibrated 3-hour estimates are now being tested by the TRMM Science and Data Information System (TSDIS), while the associated computer codes are being modified to implement future microwave data streams emanating from Advanced Microwave Sounding Unit (AMSU) and Advanced Microwave Sounding Radiometer (AMSR) instruments.

Clearly, the evolving era of merged multiple-satellite rain estimates underpinned by a reliable calibrating source such as TRMM represents a valuable testbed for developing the GPM constellation mission's data processing system. Yet, problems still loom. For example, TRMM is projected to provide data only through the 2003-2004 time frame. Also, the EOS era constellation will not achieve consistent global coverage or 3-hour time resolution at a sufficient frequency. Moreover, there are genuine scientific concerns with the current techniques used to estimate precipitation from geo-IR data streams in order to achieve high temporal resolution.

4.0 What are Drawbacks of IR-Based Rain Estimation Techniques?

The current TRMM approach to achieve high temporal precipitation sampling, i.e., to estimate 3-hourly rainfall maps, employs geo-IR measurements to fill temporal gaps not sampled by the TRMM satellite. While the robust temporal coverage provided by geosynchronous infrared data has been an unchallenged asset of the world's geostationary satellite network, geo-IR retrieval algorithms have been problematic since the first attempts to use them began in the mid 1970s. The major shortcoming is that they suffer from underlying weak statistical relationships between IR radiances at cloud top (generally represented as equivalent black body temperatures or (EBBTs)) and rainfall at the surface. In the recent reviews of Bellerby et al. (2000) and Ba and Gruber (2001) concerning several well-established geo-IR techniques used in the operational community, these problems are underscored.

The standard assumption behind all such techniques is that cold cloud tops (e.g., cloud EBBTs below some threshold) are directly associated with precipitating cumulonimbus clouds. This is why geo-IR techniques largely perform as convective precipitation algorithms, albeit several attempts have been made with marginal success to classify cold clouds into convective or stratiform categories according to EBBT texture signatures. Nonetheless, high-level cirrus and other non-precipitating clouds often exhibit cloud-top temperatures below the screening threshold, which then creates false precipitation areas. This results in inherent overestimation of rainfall when cirrus and other cold cloud tops are present. If the estimates are later bias-adjusted according to a microwave algorithm, the procedure which the TRMM algorithm incorporates, the average rain rates applied to the true raining areas must be underestimated to compensate for assigning positive rain rates to the false areas.

Geo-IR techniques are also generally found to underestimate rainfall from stratocumulus clouds, which are ubiquitous in mid-latitude coastal regions, because much of the drizzle regions of the stratocumulus decks have cloud top temperatures warmer than the precipitation cutoff. In the case of altostratus and multi-layered cloud systems, geo-IR-techniques exhibit variable performance according to the ambient thermal conditions. Further difficulties are introduced by the inability of these techniques to sense any direct information on rainfall occurring below the cloud bases of precipitating clouds as Bellerby et al. (2000) has discussed. In addition, geo-IR techniques must apply significant downscale averaging to achieve any meaningful accuracy.

For these reasons and other more subtle problems, 3-hourly estimates using geo-IR calibration and merging techniques are susceptible to significant uncertainties. In general, such techniques possess bias and precision uncertainties for 3-hour estimates exceeding 20 percent and 50 percent, respectively, with little room to improve because there are no meaningful physics tools to exploit in making the estimates. This is the foremost reason why a microwave constellation system is so appealing to precipitation users, and why the GPM mission offers such a compelling research program to scientific disciplines affected by the global water cycle.

5.0 How will GPM Improve Frequent Global Rain Estimates?

GPM represents the next generation of space-based precipitation estimation and builds upon valuable knowledge and experience gained during the TRMM era. In the GPM era, up to nine constellation satellites will provide more accurate and physically-based microwave precipitation estimates on a global basis with ~5 percent bias and ~20 percent precision uncertainty for 3-hourly products. Such direct measurements of precipitation and hydrometeor structure mitigate errors introduced by non-precipitating clouds, diverse

macro cloud physics, and varying precipitation types. GPM's novel Dual Frequency Precipitation Radar (DPR) and its up to nine passive microwave radiometers (PMRs) on the constellation fleet provide an excellent means to cross-calibrate similar precipitation-measuring instruments in space and on the ground (e.g., from carefully-instrumented ground validation sites). Thus, GPM will enable improved measurements of light rain, warm rain, snow, and other modes of frozen precipitation. The DPR will better detect explicit precipitation microphysics than was possible from the single frequency TRMM Precipitation Radar (PR), thereby leading to improvements in latent heating algorithms and mass spectra properties associated with the highly varying drop size distribution (DSD). See Figure 1.

GPM is also important because from an end-user perspective it will almost seamlessly advance a rainfall product line from the TRMM era in which acquiring the first complete and accurate tropical climatology of rainfall was the major objective, to an era where high frequency sampling, complete global coverage, microphysical variability, and thorough error quantification will become a reality. All of these new capabilities are needed for a significant improvement in our understanding of the global water and energy cycle and in detecting actual accelerations or decelerations in the water cycle that are associated with changes in the Earth's climate system, particularly in terms of global temperatures. Furthermore, a broad sector of the applications community will be provided with critical new datasets needed for improving weather forecasting, flood prediction, freshwater resources prediction, agricultural planning, health monitoring and other important applications with bearing on people's lives and livelihoods. Finally, GPM will engage multiple international partnerships consistent with the United Nation's designation of the GPM mission as a centerpiece for peaceful uses of outer space.


Bridging from Current to Next Generation Space-Based & Frequent Global Precipitation Estimates



Current Capabilities:
Year 2002-TRMM + 2 SSM/I





Cap-filling & high time resolution achieved by calibrating & merging lesser quality infrared (IR) data. IR estimates must be implemented to obtain 3-hourly products – but known IR problems with non-precipitating cumulus, stratus, & cirrus lead to bias & precision uncertainties in 3-hour estimates exceeding 20% & 50%, respectively.

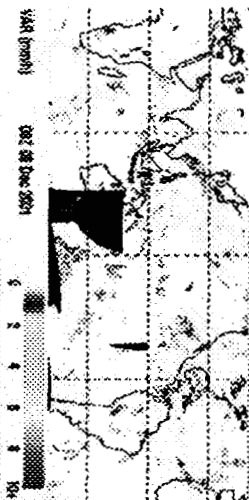

Current Capabilities?
Year 2007: How GPM Advances

Year 2002-2007 TRMM +
EOS Aqua Satellites
Enables Pre-GPM
Correlation Tested

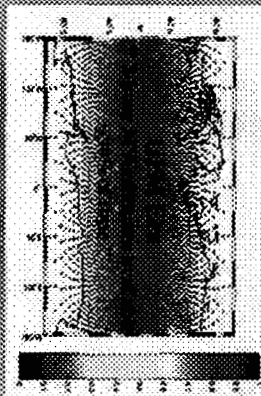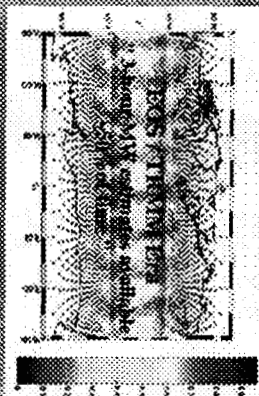

- Provides more accurate & physically-based global full-microwave rain estimates.
- Generates user-friendly gridded precipitation products (with quantitative error quantification) driven by need of stakeholders -- e.g., climate scientists, weather/hydro-meteorological model forecasters, & algorithm developers.
- Enables near global coverage of high quality rain measurements (i.e., ~5% bias & ~20% precision uncertainties for 3-hour products).
- Improves measurement of frozen precipitation & snow, as well as light & warm rain.
- Detects explicit precipitation microphysics using first dual-frequency space Radar.
- Allows seamless extension from TRMM of precipitation climatologies for assessing global water cycle variations & climate changes.
- Includes pre-launch assessment of needs of broad applications communities including those of freshwater resources, agriculture, health, emergency management, & public communications.
- Engages multiple international partnerships consistent with recent U.N. designation of GPM mission for peaceful uses of space.

Figure 1: Schematic of how bridging process from TRMM to GPM missions will improve in 3-hour rain products.

6.0 References

- Adler, R.F., G.J. Huffman, D.T. Bolvin, S. Curtis, and E.J. Nelkin, 2000: Tropical rainfall distribution determined using TRMM combined with other satellite and rain gauge information. *J. Appl. Meteor.*, **39**, 2007-2023.
- Ba, M.B., and A. Gruber, 2001: GOES multispectral rainfall algorithm (GMSRA). *J. Appl. Meteor.*, **40**, 1500-1514.
- Bellerby, T., M. Todd, D. Kniveton, and C. Kidd, 2000: Rainfall estimation from a combination of TRMM precipitation radar and GOES multispectral satellite imagery through the use of an artificial neural network. *J. Appl. Meteor.*, **39**, 2115-2128.
- Kummerow, C., J. Simpson, O. Thiele, W. Barnes, A.T.C. Chang, E. Stocker, R.F. Adler, A. Hou, R. Kakar, F. Wentz, P. Ashcroft, T. Kozu, Y. Hong, K. Okamoto, T. Iguchi, H. Kuroiwa, E. Im, Z. Haddad, G. Huffman, B. Ferrier, W.S. Olson, E. Zipser, E.A. Smith, T.T. Wilheit, G. North, T. Krishnamurti, and K. Nakamura, 2000: The status of the Tropical Rainfall Measuring Mission (TRMM) after two years in orbit. *J. Appl. Meteor.*, **39**, 1965-1982.
- Li, Q., R.L. Bras, and D. Veneziano, 1996: Analysis of Darwin rainfall data: Implications on sampling strategy. *J. Appl. Meteor.*, **35**, 372-385.
- Morrissey, M.L., and J.E. Janowiak, 1996: Sampling-induced conditional biases in satellite climate-scale rainfall estimates. *J. Appl. Meteor.*, **35**, 541-548.
- Simpson, J., C. Kummerow, W.-K. Tao, and R.F. Adler, 1996: On the Tropical Rainfall Measuring Mission (TRMM) satellite. *Meteorol. Atmos. Phys.*, **60**, 19-36.
- Smith, E.A., C. Kummerow, and A. Mugnai, 1994: The emergence of inversion-type precipitation profile algorithms for estimation of precipitation from satellite microwave measurements. *Remote Sensing Reviews*, **11**, 211-242.
- Smith, E.A., J. Lamm, R. Adler, J. Alishouse, K. Aonashi, E. Barrett, P. Bauer, W. Berg, A. Chang, R. Ferraro, J. Ferriday, S. Goodman, N. Grody, C. Kidd, D. Kniveton, C. Kummerow, G. Liu, F. Marzano, A. Mugnai, W. Olson, G. Petty, A. Shibata, R. Spencer, F. Wentz, T. Wilheit, and E. Zipser, 1998: Results of WetNet PIP-2 project. *J. Atmos. Sci.*, **55**, 1483-1536.
- Soman, V.V., J.B. Valdes, and G. North, 1995: Satellite sampling and the diurnal cycle statistics of Darwin rainfall data. *J. Appl. Meteor.*, **34**, 2481-2490.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE April 2002		3. REPORT TYPE AND DATES COVERED Technical Memorandum
4. TITLE AND SUBTITLE Global Precipitation Measurement - Report 7 Bridging from TRMM to GPM to 3-Hourly Precipitation Estimates			5. FUNDING NUMBERS 912	
6. AUTHOR(S) J.M. Shepherd, E.A. Smith				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS (ES) Goddard Space Flight Center Greenbelt, Maryland 20771			8. PERFORMING ORGANIZATION REPORT NUMBER 2002-01681-0	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS (ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING / MONITORING AGENCY REPORT NUMBER TM—2002-211602	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Unclassified—Unlimited Subject Category: 47 Report available from the NASA Center for AeroSpace Information, 7121 Standard Drive, Hanover, MD 21076-1320. (301) 621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <p>Historically, multi-decadal measurements of precipitation from surface-based rain gauges have been available over continents. However oceans remained largely unobserved prior to the beginning of the satellite era. Only after the launch of the first Defense Meteorological Satellite Program (DMSP) satellite in 1987 carrying a well-calibrated and multi-frequency passive microwave radiometer called Special Sensor Microwave/Imager (SSM/I) have systematic and accurate precipitation measurements over oceans become available on a regular basis; see Smith et al. (1994, 1998). Recognizing that satellite-based data are a foremost tool for measuring precipitation, NASA initiated a new research program to measure precipitation from space under its Mission to Planet Earth program in the 1990s. As a result, the Tropical Rainfall Measuring Mission (TRMM), a collaborative mission between NASA and NASDA, was launched in 1997 to measure tropical and subtropical rain. See Simpson et al. (1996) and Kummerow et al. (2000). Motivated by the success of TRMM, and recognizing the need for more comprehensive global precipitation measurements, NASA and NASDA have now planned a new mission, i.e., the Global Precipitation Measurement (GPM) mission.</p> <p>The primary goal of GPM is to extend TRMM's rainfall time series while making substantial improvements in precipitation observations, specifically in terms of measurement accuracy, sampling frequency, Earth coverage, and spatial resolution. This report addresses four fundamental questions related to the transition from current to future global precipitation observations as denoted by the TRMM and GPM eras, respectively.</p>				
14. SUBJECT TERMS global precipitation measurement, global water cycle, hydrologic cycle, precipitation, rainfall, climate, freshwater resources, prediction, estimates TRMM, NASA, NASDA			15. NUMBER OF PAGES 7	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	